


MANUAL CALL POINT







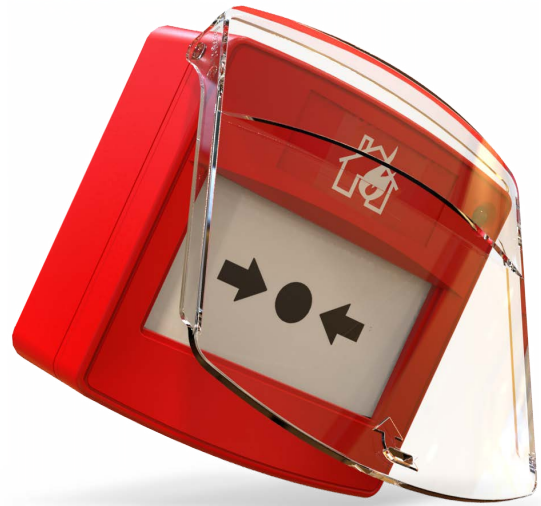










Product datasheet

Key features

- Fully wireless
- Quick and easy to install
- Small profile
- Protective transparent cover
- Unique design
- Inbuilt locking mechanism



Technical data

 Operating / storage without batteries: -10 to +55 °C	 868 MHz	   
Storage with batteries: -10 to +30 °C	 14 dBm / 25 mW	 
 2 x AA ER14505M lithium thionyl chloride batteries (<i>Fanso or Titus</i>)	 X5 (<i>signalling protocol</i>)	 0359-CPR-00266
 Indoor use only	 92 x 97 x 47 mm (<i>W x H x D</i>)	 EN54-11, EN54-13 & EN54-25
	 0.2 kg	 SC-51-0100-0001-WZ