


## MANUAL CALL POINT

### Product datasheet

#### Key features

- Fully wireless
- Quick and easy to install
- Small profile
- Protective transparent cover
- Unique design
- Inbuilt locking mechanism

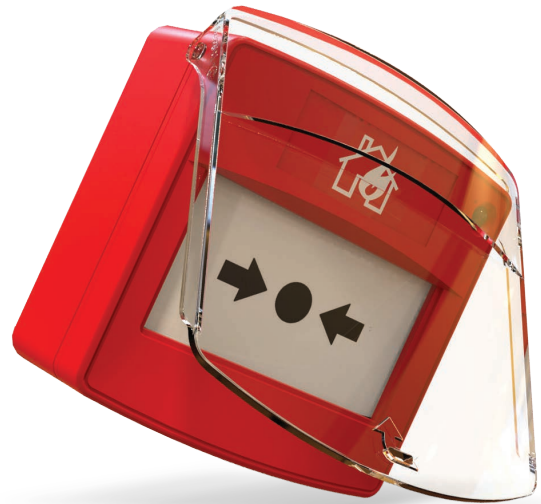

#### Technical data



Operating / storage without batteries:  
-10 to +55 °C

Storage with batteries:  
-10 to +30 °C



2 x 3.6 V lithium thionyl chloride batteries.

Fanso: ER14505M

HCB: ER14505M (HCB-JS-TZ-02-547)



Type A: Indoor use only



868 MHz



14 dBm / 25 mW



X5 (signalling protocol)



92 x 97 x 47 mm  
(W x H x D)



0.2 kg



0359-CPR-00266



EN54-11, EN54-13 &  
EN54-25



SC-51-0100-0001-WZ



[emsgroup.co.uk](https://emsgroup.co.uk)