


MANUAL CALL POINT


Product datasheet

Key features


- Fully wireless
- Quick and easy to install
- Small profile
- Protective transparent cover
- Unique design
- Inbuilt locking mechanism

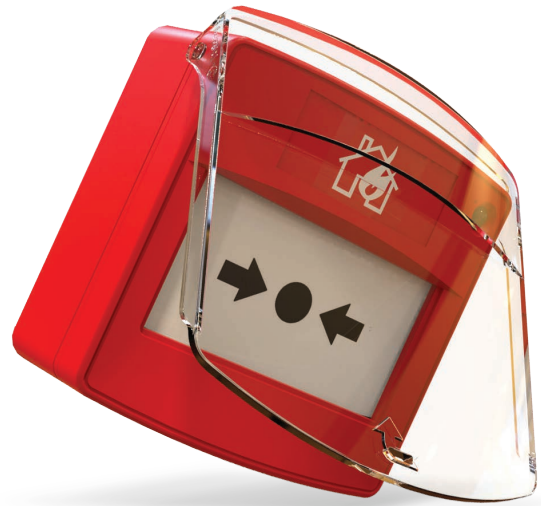

Technical data

 Operating / storage without batteries:
-10 to +55 °C

Storage with batteries:
-10 to +30 °C

 2 x 3.6 V lithium thionyl chloride batteries.

Fanso: ER14505M


HCB: ER14505M (HCB-JS-TZ-02-547)

 Type A: Indoor use only

 868 MHz

 14 dBm / 25 mW


 X5 (signalling protocol)


 92 x 97 x 47 mm
(W x H x D)


 0.2 kg

 DoP 0359-CPR-00266

 EN EN54-11, EN54-13 & EN54-25

 SC-51-0100-0001-WZ

 emsgroup.co.uk